


1130TST

FOUNDATION RIG WITH EXTENDABLE UNDERCARRIAGE

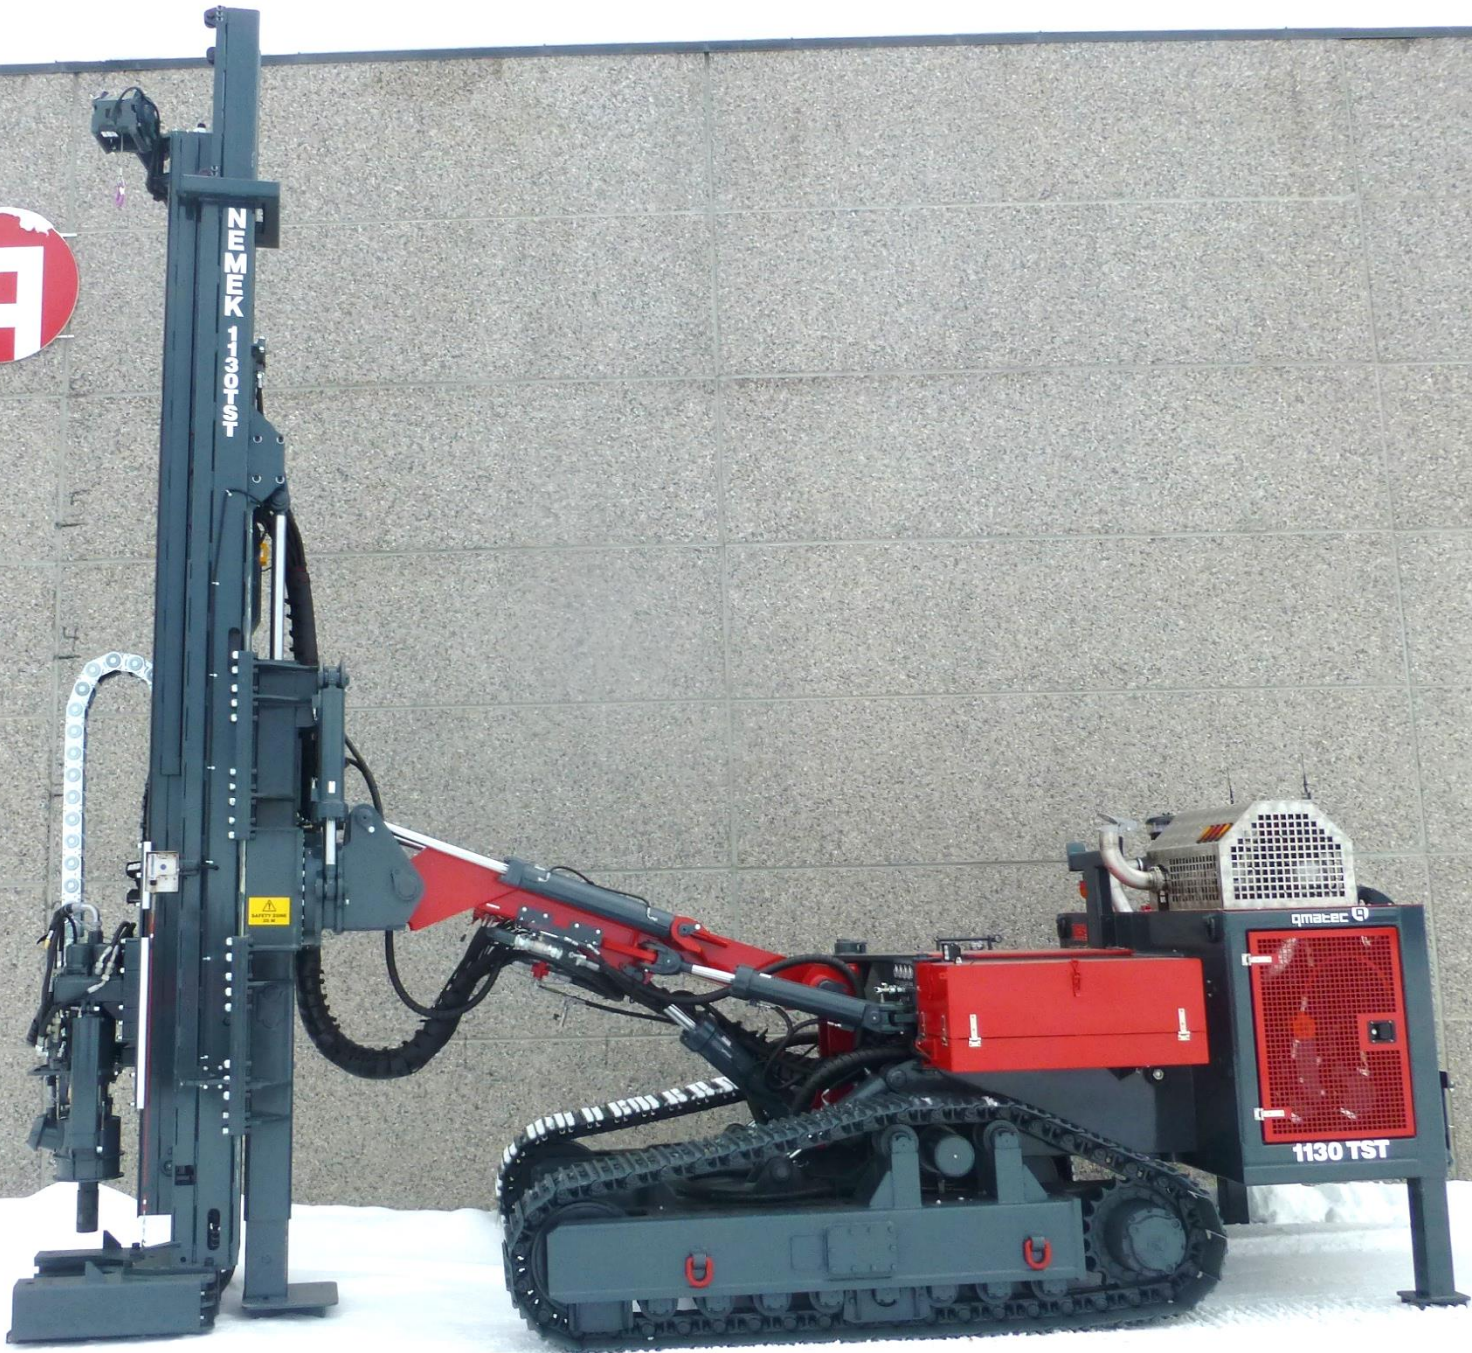

qmatec

MACHINE

Diesel Engine	Deutz TCD 6.1 Stage V
Power	180 kW
Tractive Power	33 000 Nm
Track Speed	2,5 / 4,0 km/h
Track Width	500 mm
Weight Std. from	23 000 kg
Oscillation	+10 deg.

FEEDER

Feed Stroke	7 000 mm
Feed Force	14 000 kg
Retract Force	30 000 kg
Mast Winch	750 kg
Drill Table	Ø520 / Ø620 mm
Mast Displacement	1500 mm
Mast Turn Sideways	+/-45 deg.
Rapid Pull Up	0,30 m/sec

ROTATION UNIT

Torque	Max 8 000 / 16 000 Nm
Rotation Speed	0-75 / 0-37 rpm
Spindel Thread	API 2 - 7/8"IF

OTHER

Battery	2 x 75 Ah dry
Hydr. tank	430 L
Diesel Tank	360 L

SELECTION OF OPTIONAL EQUIPMENT

Main Winch 6700 kg
 Drill Table with Keys
 Water Tanks / Tool Cabinets
 Crane 2,7 tm, Radio Operated
 Welding Machine/Generator and Water Pumps
 Digital Inclinometer w/Display on Radio
 Lubrication System
 Other Equipment Delivered acc. to Agreement

